



FOLDED GRID 016

GRD-FLD-016

Product Specifications

Product Name	Folded Grid 016					
Product ID	GRD-FLD-016					
Acoustics	0.95 - 1.00 NRC*					
Lead Time	Lead time is dependent on project size. Contact us for more information.					
Durability	Contract					

Warranty	Comes with industry-leading standard warranty.				
Flammability	ASTM E84: Class A				
Custom	Custom colors and manufacturing services available. Additional charges and lead times may apply.				
	Vacuum occasionally to remove airborne dust or debris. Mild detergents or soaps may be used to remove stains. For detailed care instructions, refer to the CSI Creative Maintenance Information document.				

Material Specifications

	Soundcore®
Content	Recycled PET acoustic felt
Weathering	Colorfast, non-deteriorating, non-hygroscopic
Entri officiation	Recycled PET acoustic felt is 60% post-consumer recycled content and is 100% recyclable. Contributes points toward LEED v4. CDPH v1.2, VOC free, non-toxic, non-allergenic, anti-microbial - does not attract mold and mildew. Compliant with Living Building Challenge criteria & DECLARE Red List Free.
Variation	PET felt panels are created through a manufacturing process known as 'felting'. This process results in a heathered appearance. Multiple color tones may appear in the same panel. Slight color variations should be expected.






*Approximate. NRC rating may vary due to product dimensions and spacing.



Dimensions

Standard Unit Dimensions

Typical ranges for length and width.




Custom Opportunity

Product dimensions can be manipulated in order to fit your design aesthetic and site conditions.


Standard Unit Thicknesses

Thickness is independent of material layer selection.






Product Details

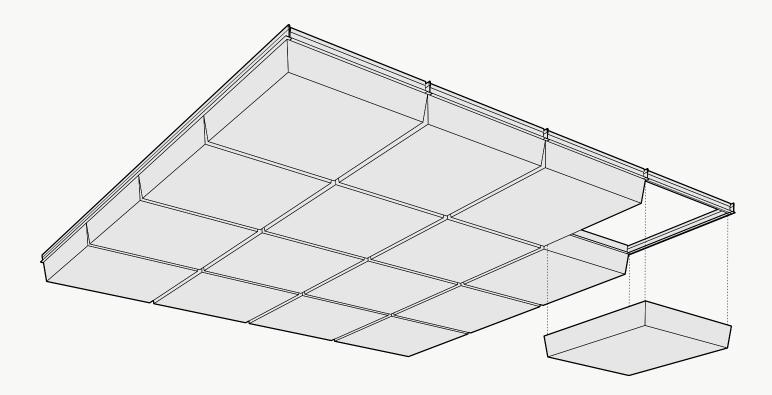



Lighting Integration

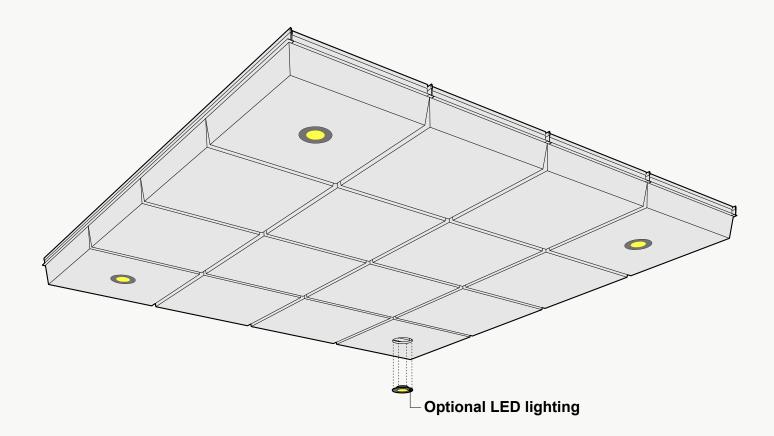




Lighting Specs

Lighting Fixture Features:

- + Circular profile: 5" Diameter
- + cETLus Listed
- + Title 24/JA8 Compliant

4" LED Recessed Light

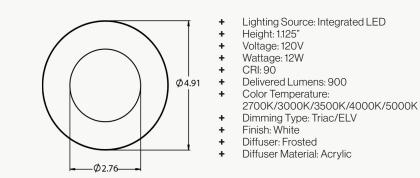





Installation Options

All products and installation methods can be customized to meet the unique requirements of your space.

Press-Fit

- + Substrate based, no hardware needed
- + Visually obstructs metal grid structure

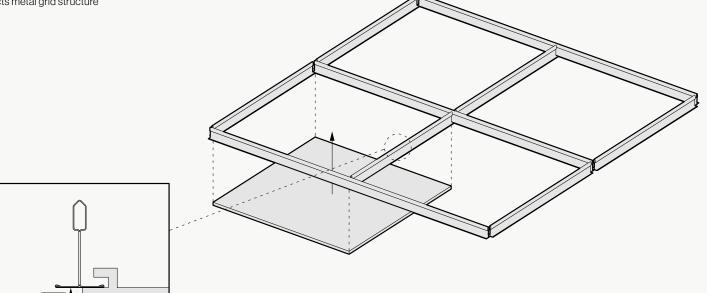



*Not all listed attachment methods may be applicable to this product.



Material Layers

Soundcore®

Our recycled PET felt creates an acoustic barrier, defending against wandering white noise and irritating echoes.






Single Layer 1/2" Thickness

Soundcore® Wood Textures

Soundcore[®] wood textures provide the natural aesthetic of wood while maintaining all the acoustic benefits of PET felt. Custom texture opportunities are also available upon request.



Single Layer ½" Thickness





Folded Grid 016 | GRD-FLD-016

Soundcore® | 1/2" Thickness

SND019	SND037	SND134	SND135	SND105	SND109	SND111	SND130	SND131	SND125
Linen	Paper	Oat	Vanilla Bean	Sand Dollar	Macadamia	Lanai	Buckskin	Abalone	Chinchilla
SND118	SND126	SND110	SND102	SND114	SND034	SND132	SND103	SND038	SND122
Anchor	Wolfhound	Starry Night	Morning Fog	Lunar Dust	Granite Peak	Cast Iron	Storm Cloud	Inkwell	Briquette
SND127	SND108	SND104	SND106	SND113	SND107	SND136	SND129	SND115	SND137
Burnt Toast	Ablaze	Pumpkin	Goldfinch	Gruner	Grasshopper	Clover	Dried Thyme	Mako	Cove
SND112	SND121	SND123	SND117	SND124	SND128	SND133	SND116	SND101	SND042
Tulum	Apatite	Chrysocolla	Serene	Ice Floe	Arctic Ocean	Galactic	Blue Marlin	Commodore	Denim



Soundcore® Wood Textures | 1/2" Thickness



Dark Teak



SND792 Dark Oak

SND795

Light Teak





SND791

Gray Oak

SND794 Warm Teak

SND714 English Walnut







SND790

Natural Teak



SND713 Honey Walnut

SND717 Warm Oak

SND712 Natural Spruce



SND711 Bleached Cherry

SNE White





SND710 Gray Teak

