



Product Specifications

Product Name	Overlap Surfaces 009	Warranty	Comes with industry-leading standard warranty.
Product ID	SUR-OLP-009	Flammability	ASTM E84: Class A
Acoustics	0.65 - 0.75 NRC*	Custom	Custom colors and manufacturing services available. Additional charges and lead times may apply.
Lead Time	Lead time is dependent on project size. Contact us for more information.	Maintenance	Vacuum occasionally to remove airborne dust or debris. Mild detergents or soaps may be used to remove stains. For detailed care instructions, refer to the CSI Creative Maintenance Information document.
Durability	Contract		

Material Specifications

	Soundcore®
Content	Recycled PET acoustic felt
Weathering	Colorfast, non-deteriorating, non-hygroscopic
Environmental	Recycled PET acoustic felt is 60% post-consumer recycled content and is 100% recyclable. Contributes points toward LEED v4, CDPH v1.2, VOC free, non-toxic, non-allergenic, anti-microbial - does not attract mold and mildew. Compliant with Living Building Challenge criteria & DECLARE Red List Free.
Variation	PET felt panels are created through a manufacturing process known as 'felting'. This process results in a heathered appearance. Multiple color tones may appear in the same panel. Slight color variations should be expected.




*Approximate - NRC rating may vary based on product dimensions and spacing. A higher NRC can be achieved with an air gap.

Dimensions


Standard Unit Dimensions

Typical ranges for height and width.

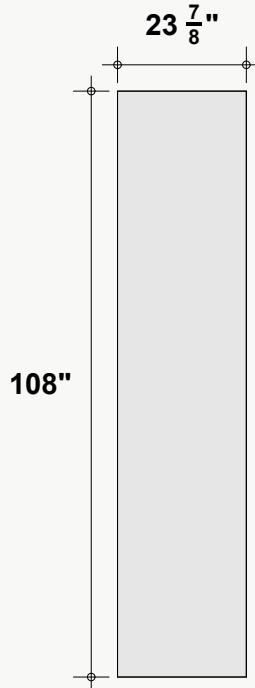

Standard Unit Thicknesses


Thickness is dependent on material layer selection.

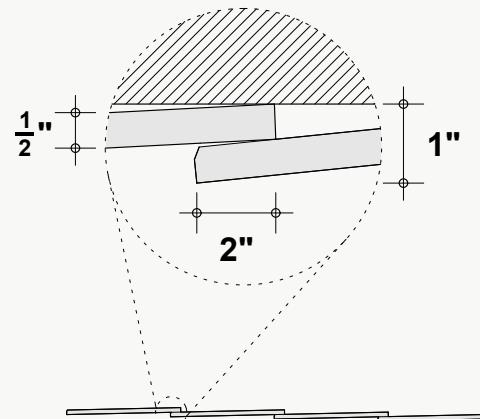

Custom Opportunity

Product dimensions can be manipulated in order to fit your design aesthetic and site conditions.

Product Details

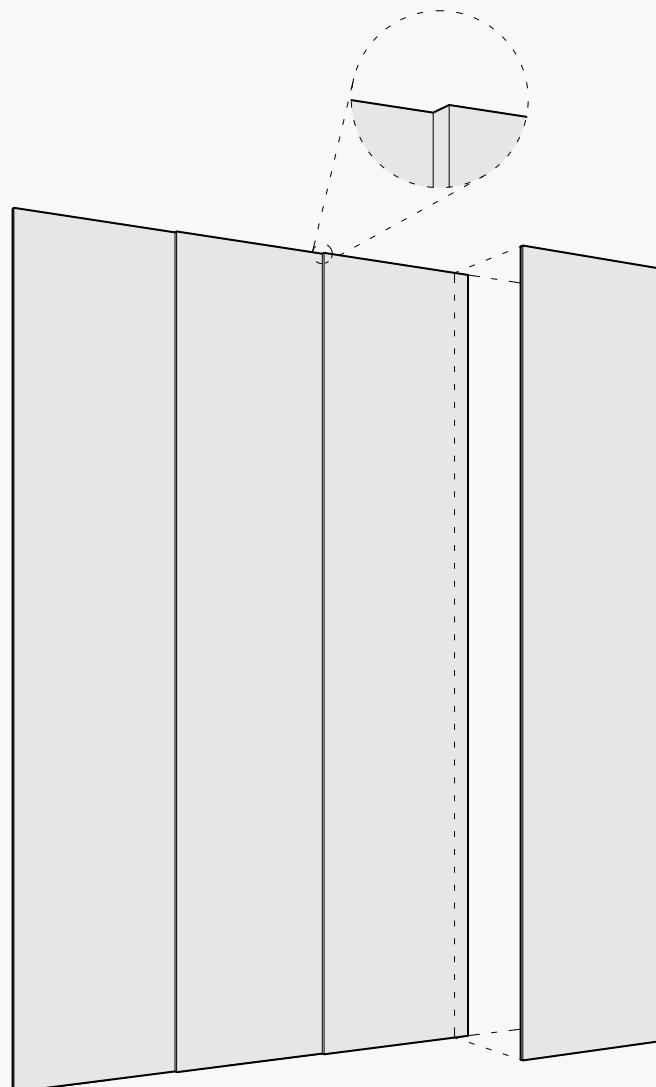

Installation Options*


*All products and installation methods can be **customized** to meet the unique requirements of your space.*

Mechanical Direct Advantages

Attachment solution using physical hardware to attach to an existing surface or substrate.

- No clamping or dry time necessary
- Easy to remove and does not damage the substrate when removed
- Most appropriate installation solution for heavier products
- Provides an opportunity for an air gap, which can increase the acoustic value of a product

Available methods: Z-Clips, Panel Clips, Standoffs, Screw & Washer, Magnet, Custom

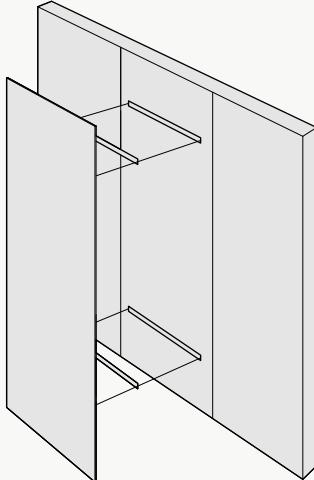

*Not all listed attachment methods may be applicable to this product.


Material Layers

Soundcore®

Our recycled PET felt creates an acoustic barrier, defending against wandering white noise and irritating echoes.



Single Layer
½" Thickness

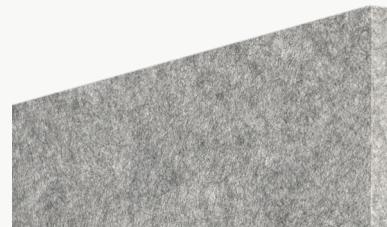

Soundcore® Wood Textures

Soundcore® wood textures provide the natural aesthetic of wood while maintaining all the acoustic benefits of PET felt. Custom texture opportunities are also available upon request.



Single Layer
½" Thickness



Soundcore® | 1/2" Thickness



Soundcore® Wood Textures | 1/2" Thickness



SND716
Dark Teak



SND792
Dark Oak



SND715
Dark Cherry



SND793
Vintage Maple



SND794
Warm Teak



SND714
English Walnut



SND795
Light Teak



SND711
Bleached Cherry



SND713
Honey Walnut



SND796
Vintage Cherry



SND717
Warm Oak



SND790
Natural Teak



SND712
Natural Spruce



SND709
White Maple



SND791
Gray Oak



SND710
Gray Teak