

Product Specifications

Product Name	Profile Clouds 003	Warranty	Comes with industry-leading standard warranty.
Product ID	CLD-PFL-003	Flammability	ASTM E84: Class A, CAN/ULC-S102.2 - FSR: 15 SDC: 100
Acoustics	0.45 - 0.60 NRC*	Custom	Custom colors and manufacturing services available. Additional charges and lead times may apply.
Lead Time	Lead time is dependent on project size. Contact us for more information.	Maintenance	Vacuum occasionally to remove airborne dust or debris. Mild detergents or soaps may be used to remove stains. For detailed care instructions, refer to the CSI Creative Maintenance Information document.
Durability	Contract		

Material Specifications

	Soundcore®	PoshFelt®	
Content	Recycled PET acoustic felt	100% Merino or Karakul wool acoustic felt	
Weathering	Colorfast, non-deteriorating, non-hygroscopic	Colorfast, non-deteriorating, non-woven, moisture resistant	
Environmental	Recycled PET acoustic felt is 60% post-consumer recycled content and is 100% recyclable. Contributes points toward LEED v4. CDPH v1.2, VOC free, non-toxic, non-allergenic, anti-microbial - does not attract mold and mildew. Compliant with Living Building Challenge criteria & DECLARE Red List Free.	100% organic wool design felt is a rapidly renewable resource and is 100% biodegradable/compostable. Contributes points toward LEED v4. CDPH v1.2, VOC free, no chemical irritants, no formaldehyde, and is free of other harmful substances. Compliant with Living Building Challenge criteria & DECLARE Red List Free.	
Variation	PET felt panels are created through a manufacturing process known as 'felting'. This process results in a heathered appearance. Multiple color tones may appear in the same panel. Slight color variations should be expected.	Due to its 100% natural origin, the raw fibers of wool felt contain inclusions and color variations throughout the material. Color matching is not guaranteed between dye lots and inconsistencies may be more prominent in volumes that exceed the normal commercial standard.	


*Approximate. NRC rating may vary due to product dimensions and spacing.



Dimensions


Standard Unit Dimensions

Typical ranges for length and width.

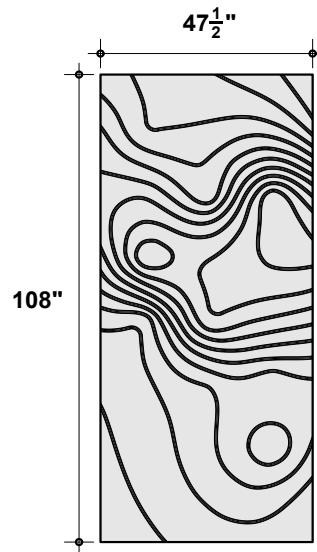

Standard Unit Thicknesses


Thickness is dependent on material layer selection.

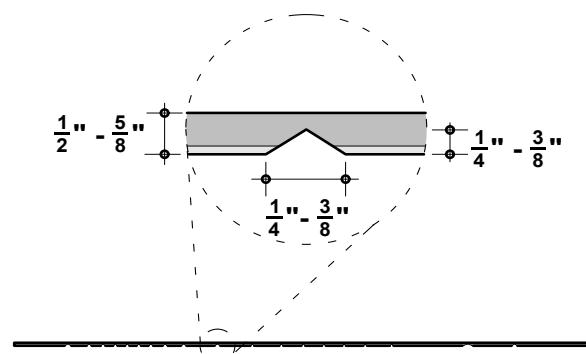

Custom Opportunity

Product dimensions can be manipulated in order to fit your design aesthetic and site conditions.


Product Details

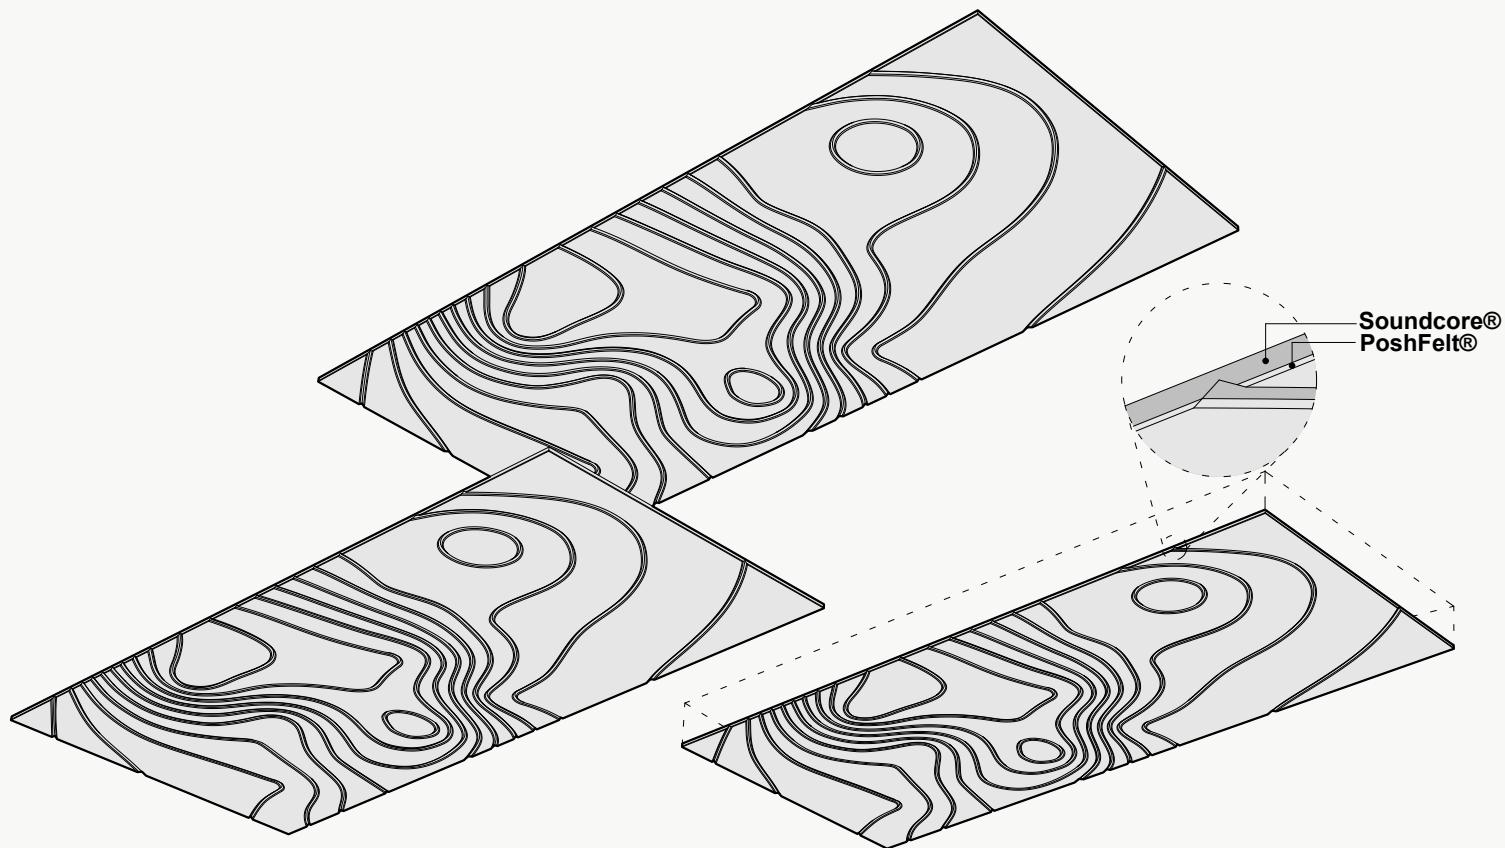

Attachment Methods*


Aircraft Cable

- + Fastest/easiest height adjustment
- + Largest height adjustment range
- + Height and angle versatility
- + Accommodates uneven ceiling surfaces and MEP




Threaded Rod

- + Reduced product sway
- + Height and angle versatility
- + Accommodates uneven ceiling surfaces and MEP



Mechanical Direct

- + Lowest profile installation method
- + Eliminates product sway
- + Connects to: Unistrut, ACT Grid, flat ceiling surfaces
- + Connections: Magnets, Grid Clips, Panel Clips, Metal Bracket, Custom



*Not all listed attachment methods may be applicable to this product.


Material Layers

Soundcore®

Our recycled PET felt creates an acoustic barrier, defending against wandering white noise and irritating echoes.




Single Layer
½" Thickness

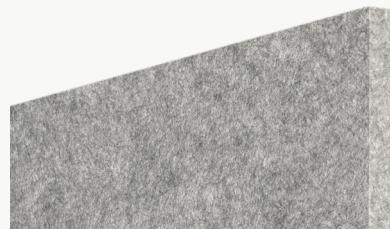

PoshFelt® Exposed Edge

100% organic, natural wool design felt brings out the best experience in your space with color, comfort, and simple sustainability. Exposed edge products leave the Soundcore® layer uncovered, allowing for unique color combinations.



Multi-Layer
Adds ⅛"-⅓" to Material Thickness



Soundcore® Wood Textures


Soundcore® wood textures provide the natural aesthetic of wood while maintaining all the acoustic benefits of PET felt. Custom texture opportunities are also available upon request.



Single Layer
½" Thickness



PoshFelt® | 3mm Thickness

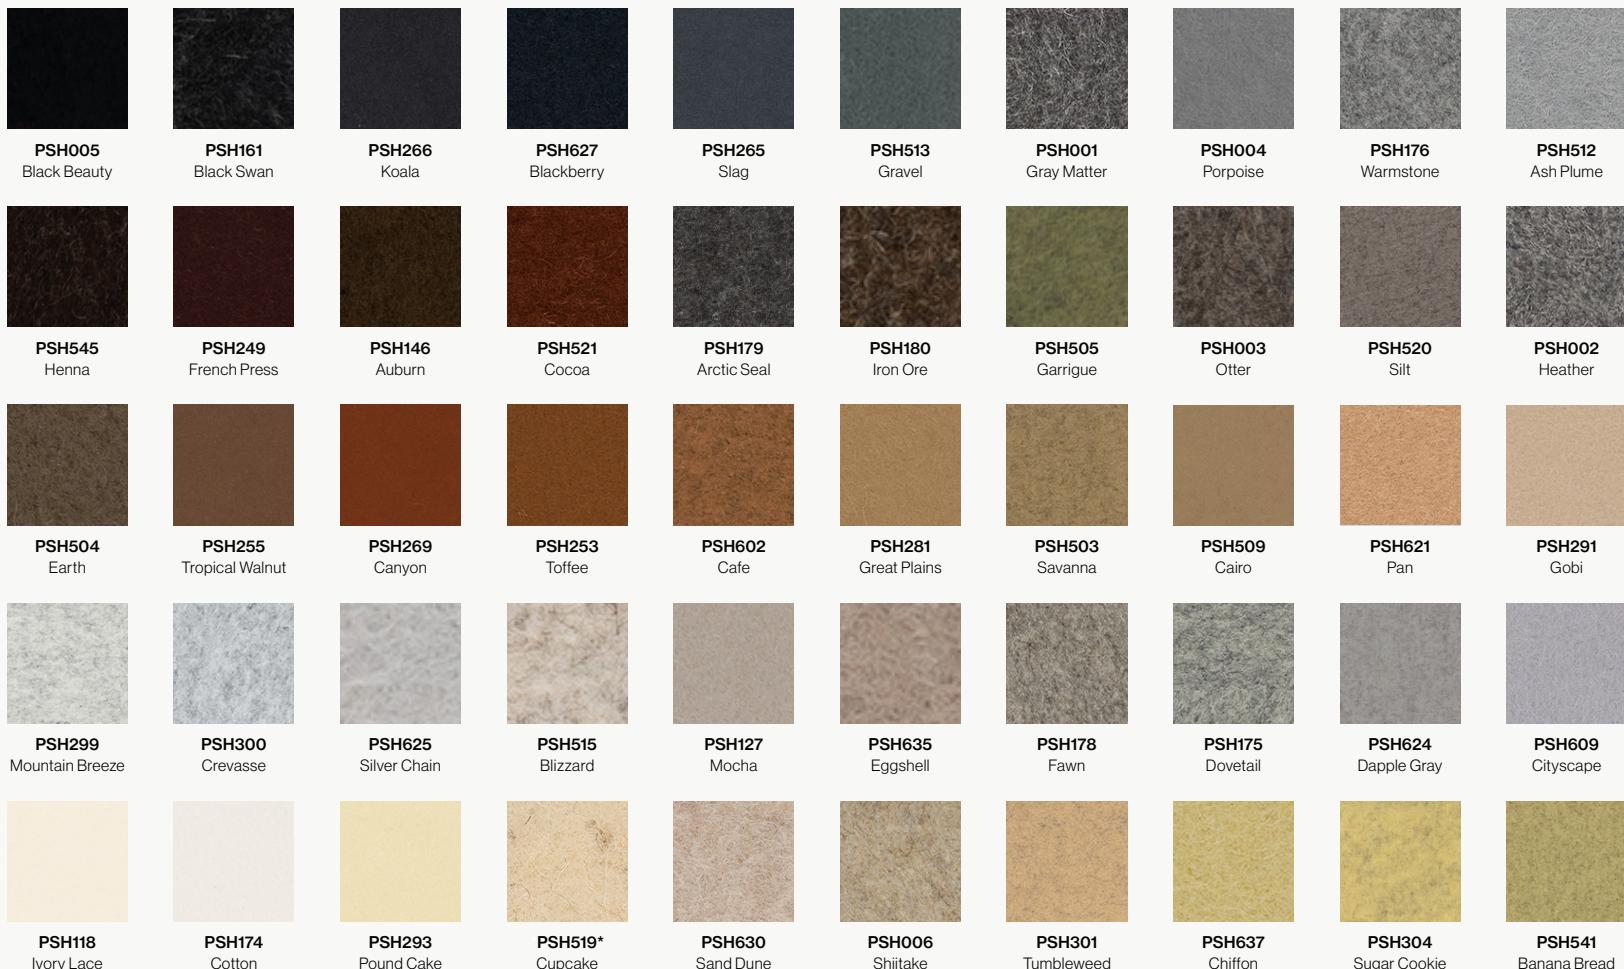


* 6-roll MOQ

PoshFelt® | 3mm Thickness



PoshFelt® | 3mm Thickness

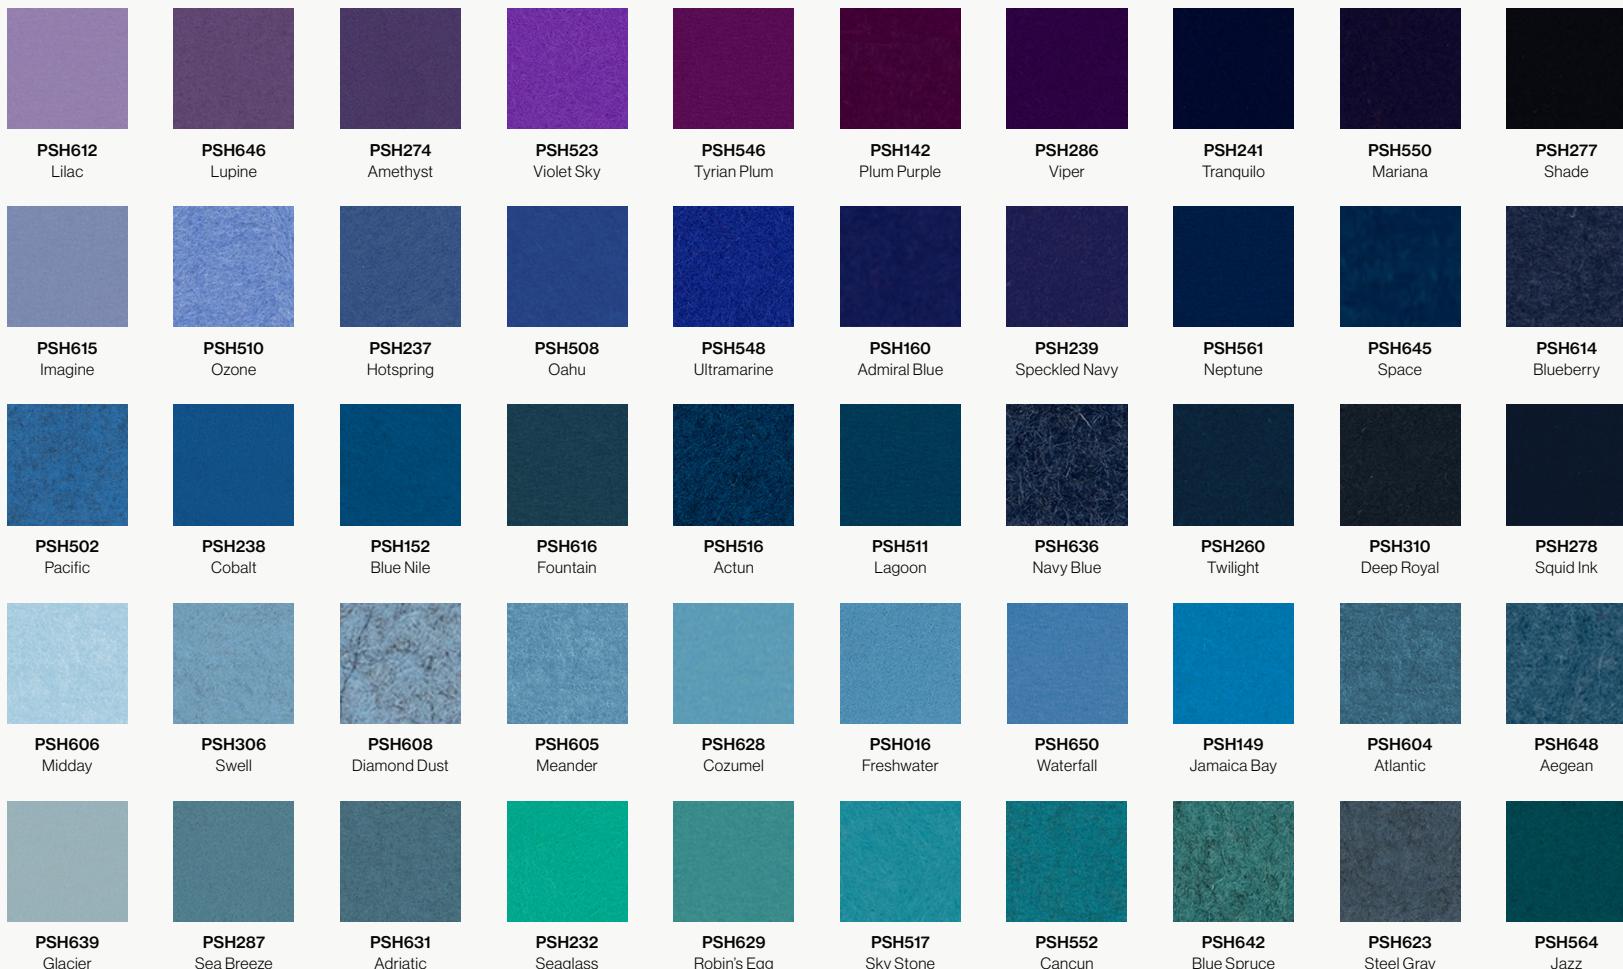

PoshFelt® | 3mm Thickness



Soundcore® | 1/2" Thickness



Soundcore® Wood Textures | 1/2" Thickness



SND716
Dark Teak



SND792
Dark Oak



SND715
Dark Cherry



SND793
Vintage Maple



SND794
Warm Teak



SND714
English Walnut



SND795
Light Teak



SND711
Bleached Cherry



SND713
Honey Walnut



SND796
Vintage Cherry



SND717
Warm Oak



SND790
Natural Teak



SND712
Natural Spruce



SND709
White Maple



SND791
Gray Oak



SND710
Gray Teak